


BOPET Transparent Film

CF-B0-CPF

Typical Values

Structure

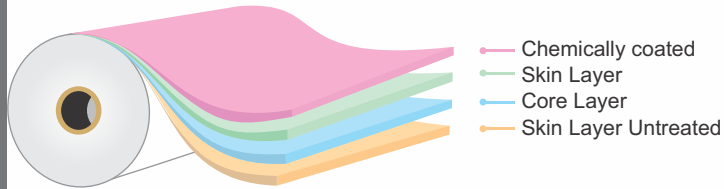

Description

It is a co-extruded, transparent BOPET (Bi-axially Oriented Polyethylene terephthalate) film. The film is one side Chemically coated & the other side Untreated.

Features

- High clarity
- Primer coating provides excellent adhesion with Inks & adhesives
- Best suitable grade for converting applications
- Excellent dimensional stability & machinability

Applications

- Converting & metallization
- Printing & lamination
- FFS & seal structures

Note : Film is not suitable for hot fill, sterilization or pasteurization

Properties	Ref.	Units	ASTM#/Test Method	CF-B0-CPF							
Physical Data											
Average Thickness		micron	D-374-C	8	10	12	15	19	23	36	50
		gauge		32	40	48	60	76	92	144	200
		mils		0.3	0.4	0.5	0.6	0.7	0.9	1.4	2.0
Density		g/cc		1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
Average Substance		g/m ²		11.2	14.0	16.80	21.0	26.6	32.20	50.40	70.0
Yield		m ² /Kg	D-4321	89.28	71.42	59.52	47.62	37.59	31.06	19.84	14.29
		in ² /lb		62770	50213	41846	33480	26428	21837	13948	10046
Optical Data											
Haze		%	D-1003	4.0	4.0	4.0	4.0	4.0	4.0	4.5	5.0
Mechanical Data											
Tensile Strength	MD	kg/ cm ²	D-882	2000	2000	2100	2100	2100	2100	2000	2000
	TD			2100	2100	2200	2200	2200	2200	2100	2100
Elongation	MD	%	D-882	95	95	100	105	110	115	120	120
	TD			85	85	90	90	95	95	100	100
Thermal Data											
Linear Shrinkage (150°C/302°F, 30 min.)	MD	%	D-1204	2.8							
	TD			0.80							
Surface Data											
Surface tension	CS/UT	dynes/cm	D-2578	58-60 / 42-44							
Kinetic COF	A/B		D-1894	0.50	0.50	0.48	0.48	0.45	0.45	0.40	0.40
Barrier Data											
MVTR (38 °C, 90%RH)		g/m ² /day	F-1249	50	50	45	40	35	30	20	16
MVTR (100 °F, 90%RH)		g/100in ² /day		3.2	3.2	2.9	2.6	2.3	2.0	1.3	1.0
OTR (23 °C, 0%RH)		cc/m ² /day	D-3985	155	155	130	110	90	80	70	45
OTR (73 °F, 0%RH)		cc/100in ² /day		10.1	10.1	8.5	7.1	5.8	5.2	4.5	2.9

CTM : Cosmo Test Method MD : Machine Direction TD : Transverse Direction CT : Corona Treated CS : Coated Side B0 or UT : Untreated

Storage & Handling : PET film needs to be stored in a warehouse below 35°C (95°F) and should not be exposed to direct sunlight, sources or high humidity. If the material is stored in the recommended conditions PET is suitable for use within 9 months from the date of dispatch

Disclaimer : The information provided above is based on COSMO FILMS conclusive tests, which are indicative only and provided as guidelines. They do not constitute a guarantee of any specific product attributes or the suitability of products for specific applications.